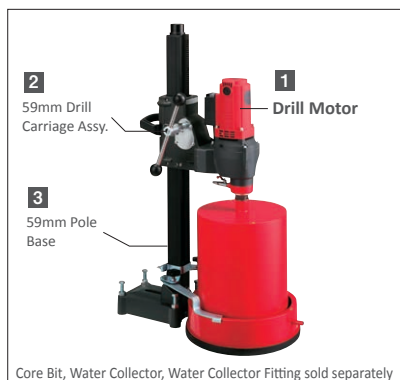




Drill Motor

Drill Motor SPM-303series



2 speed Drill Motor for professional!!



Core Bit, Water Collector, Water Collector Fitting sold separately

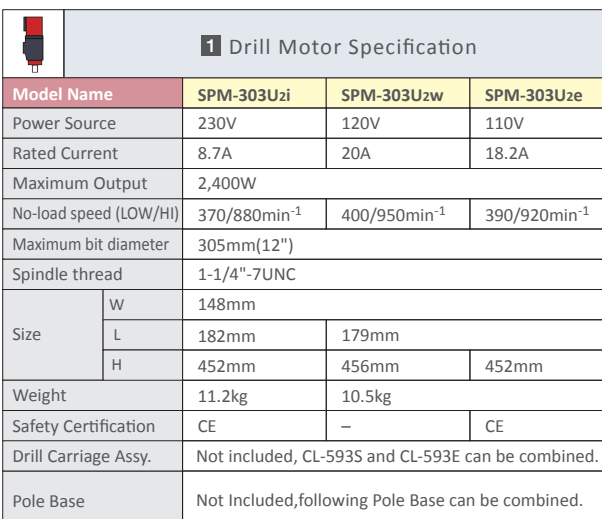
Drill Motor SPO-400series

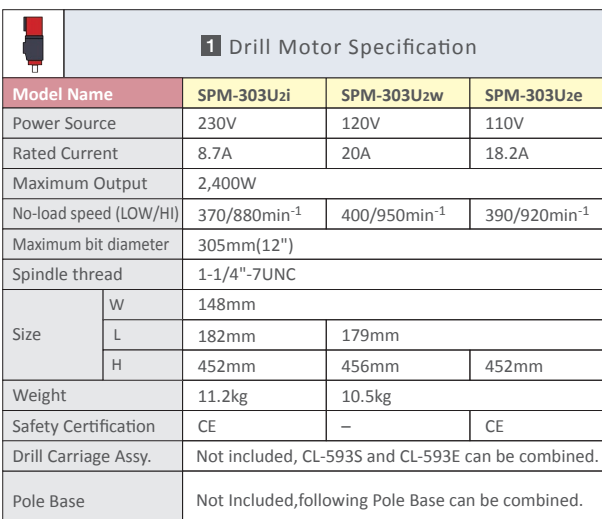



3 speed powerful Drill Motor for professional!!



Core Bit, Water Collector, Water Collector Fitting sold separately

The image shows a technical specification table for a drill motor. The table has a header row with a red and black drill icon on the left and a title '1 Drill Motor Specification' in the center. Below the header, there are three columns for different models: SPM-303Uzi, SPM-303Uzw, and SPM-303Uze. The rows list various specifications: Power Source (230V, 120V, 110V), Rated Current (8.7A, 20A, 18.2A), Maximum Output (2,400W), No-load speed (LOW/HI) (370/880min⁻¹, 400/950min⁻¹, 390/920min⁻¹), Maximum bit diameter (305mm(12")), Spindle thread (1-1/4"-7UNC), Size (W, L, H dimensions), Weight (11.2kg, 10.5kg), Safety Certification (CE, -, CE), Drill Carriage Assy. (Not included, CL-593S and CL-593E can be combined), and Pole Base (Not Included, following Pole Base can be combined).

	1 Drill Motor Specification		
Model Name	SPM-303Uzi	SPM-303Uzw	SPM-303Uze
Power Source	230V	120V	110V
Rated Current	8.7A	20A	18.2A
Maximum Output	2,400W		
No-load speed (LOW/HI)	370/880min ⁻¹	400/950min ⁻¹	390/920min ⁻¹
Maximum bit diameter	305mm(12")		
Spindle thread	1-1/4"-7UNC		
Size	W	148mm	
	L	182mm	179mm
	H	452mm	456mm
Weight	11.2kg	10.5kg	
Safety Certification	CE	—	CE
Drill Carriage Assy.	Not included, CL-593S and CL-593E can be combined.		
Pole Base	Not Included, following Pole Base can be combined.		

		1 Drill Motor Specification	
Model Name		SPO-400A3t	SPO-400U3w
Power Source		120V	
Rated Current		15A	24A
Maximum Output		3,600W	
No-load speed (LOW/HI)		300/700/950min ⁻¹	
Maximum bit diameter		406mm(16")	
Spindle thread		A-rod	1-1/4"-7UNC
Size	W	146mm	241mm
	L	184mm	393mm
	H	472mm	483mm
Weight		11.4kg	16.9kg
Safety Certification		—	
Drill Carriage Assy.		Not included, CL-593S and CL-593E can be combined.	Included
Pole Base		Not Included, following Pole Base can be combined.	
Spacer type		Special Spacer 59mm (Thickness 30mm)	

Common Option 59mm Drill Carriage Assy.

PAT.5142832

2 59mm Drill Carriage Assy.				
Model name	CL-592C	CL-592EC	CL-593S	CL-593E
Mechanism	Slide plate type		Roller slide type	
Autofeed	N/A	Yes	Yes	Yes
Weight	5.2kg	5.9kg	5.4kg	5.6kg
Standard Accessories	Fixing bolt for drill motor Parallel Key 10x8x115mm Single-ended wrench 13mm Hex. Bar wrench 4mm			

4 59mm Spacer			
Qty	1pc	2pcs	3pcs
Thickness	30mm		
Weight	0.5kg	1.0kg	1.5kg
Standard Accessories	Parallel Key Fixing bolt		

Common Option 59mm Pole Base

3 59mm Pole Base						
Model name	SB-594-800	SB-594-900	SB-594-1000	SB-594-1035	SB-594-1235	SB-594-1535
Travel length	424mm	524mm	624mm	624mm	824mm	1,124mm
Weight	11.1kg	11.9kg	12.7kg	13.4kg	15.0kg	17.5kg

Coring

Core Drill (Rig type)

Auto Feed EHAC

Core Drill Options

Diamond Core Bit

Dry Hand Core Drill

Cutting

Wall Cutter

Plunge Cutter

Wire Saw

Hydraulic Unit