




Drill Motor

Drill Motor SPX-601 series

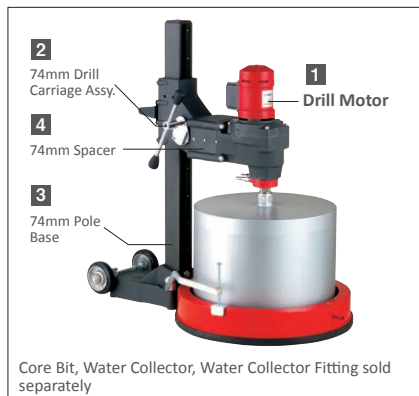

Heavy-duty 2 speed Drill Motor for large diameter. Professional-use!



1 Drill Motor Specification			
Model name		SPX-601U2x	SPX-601A2x
Power source		230V	
Rated current		15.8A	
Rated input		3,630W	
No-load speed (LOW/HI)		100/200min ⁻¹	
Maximum bit diameter		600mm(24")	
Spindle thread		1-1/4"-7UNC	A-rod
Size	W	187mm	
	L	225mm	
	H	504mm	489mm
Weight		19.8kg	19.1kg
Spacer type		Special Spacer 74mm (Thickness 52mm)	
Spacer quantity	Up to 480mm	0 pc	
	Up to 590mm	1 pc	
	600 to 690mm	2 pcs	
Safety Certification		-	
Drill Carriage Assy.		Not included, CL-743 and CL-743E can be combined.	
Pole Base		Not Included, SB-741 and RB-741 series can be combined.	

Common Option 74mm Drill Carriage Assy.

2 74mm Drill Carriage Assy.		
Model name	CL-743	CL-743E
Mechanism	Slide Plate type	
Autofeed mounting	Impossible	Possible
Weight	7.3kg	7.8kg
Applicable Drill Motor	SPX-24 series	
Applicable Pole Base	74mm Pole Base	
Standard Accessories	Single-ended wrench 13mm, Hex. Bar wrench 4mm	

4 74mm Spacer		
Number of spacer	2 pcs	4 pcs
Thickness	52mm	
Weight	3.0kg	5.7kg
Standard Accessories	Threaded rod, Hex. Nut, Parallel Key	

Common Option 74mm Pose Base.

3 74mm Pole Base			
Type	Standard		Swiveling Pole Base
Model name	SB-741-1050		RB-741-1085
Travel length	592mm		
Weight	19kg		28kg

Coring

Core Drill (Rig type)

Auto Feed EHAC

Core Drill Options

Diamond Core Bit

Dry Hand Core Drill

Cutting

Wall Cutter

Plunge Cutter

Wire Saw

Hydraulic Unit